



### Safety Shower

Model 6250 GI

|                                       |   |
|---------------------------------------|---|
| DESCRIPTION                           | Emergency Safety Shower cum Eye Wash fountain and foot operated Model-6250 GI.  |
| <b>DETAIL COMPONENT SPECIFICATION</b> |   |
| 1. SHOWER HEAD                        | Made of highly visible yellow ABS plastic. Shower heads between 82" to 96" above floor surface. (Size-265mm)  |
| 2. PULL ROD                           | For supply and control of water flow in shower head. Pull rod is within 69" height above floor surface. (Size-737mm)  |
| 3. SHOWER VALVE                       | Through passage valve that opens automatically when the lever is pushed or pulled. The valve stays open until it is manually closed.  |
| 4. EYEWASH HEAD                       | Two high-flow sprays operated at low pressure which washes the eye and face. Anti-dust to protect the head from airborne contaminants and automatically opens with the water pressure. (Distance between two eyewash head-165mm). |
| 5. EYEWASH BOWL                       | Highly visible yellow ABS plastic resistant to damage from most acid, alkali and oil. (Size-298mm)  |
| 6. PUSH TO OPEN VALVE                 | Its connection to uninterrupted water supply of 3 gallons.  |
| 7. FOOT PEDAL                         | For supply and control of water flow in the eyewash head.   |
| 8. BASE PLATE                         | To hold the shower structure in a stable position. (Size-180mm).  |

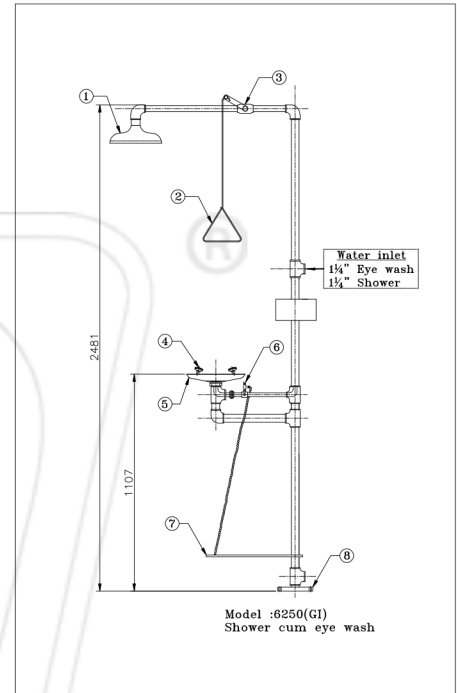

|                         |  |                                  |
|-------------------------|--|----------------------------------|
| WATER INLET CONNECTION  | 1 1/4" Eye wash  |                                  |
|                         | 1 1/4" Shower  |                                  |
| WATER OUTLET CONNECTION | 1 1/4" Tee.  |                                  |
| SUPPLY WATER CONDITION  | Supply Water   | Drinking Water                   |
|                         | Operating Press.   | 2.81 Kg/cm <sup>2</sup> (40 PSI) |
|                         | Operating Temp.  | Ambient                          |
| MATERIAL                | 1) Pipe  | GI                               |
|                         | 2) Fitting   | GI                               |
|                         | 3) Flange  | Castron                          |
| WEIGHT                  | 18.04Kg.   |                                  |
| FLOW                    | 110 LPM  |                                  |
| APPROVAL                |  IS: 10592:1982 |                                  |

NOTE: All dimensions are in millimeter. City/flow water delivered from eyewash & shower shall be as per IS: 10592:1982