

Technical Specification Sheet

UNIVERSAL CIRCUIT BREAKER LOCKOUT (CURVATURE SHAPE)

Material : ABS + Metal screw

Locking holes : 01

Accepts shackle up to : 8mm

Weight : 6.5 gm

Non foldable screw: length 11.4mm, thickness 4.9mm

Size : Height 45mm Width 25mm Depth 10mm

MCB toggle locking curve 10mm


Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF situation.

Device can be installed manually by switching OFF the breaker then loosening the screw [with screw driver] fix it on MCB, tighten the screw further set lock and tag by an authorized person.

Suitable to lockout single / double / three pole operating handle circuit breaker.



LS-BR19

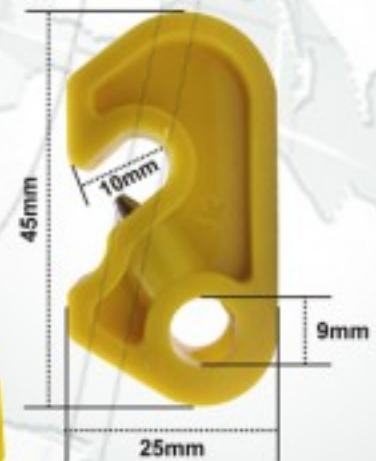

Intallation



ITEM CODE

DESCRIPTION

WEIGHT

LS-BR19

NORMAL SCREW SMALL, CURVATURE

6.5GM