



KARMSLV

## KARMSLV

### Materials Used

Knitting – 2/16 Kevlar® knitted  
Thumb Overlock Binding- Coloured  
Polypropylene Yarn  
Thickness- 1.1 mm

### Length


38-40 cm

### Color

Yellow

### Features:

Seamless knitting construction eliminates uncomfortable seams that can rub, tear or chafe, Open back configuration provides superior ventilation. Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue, Colour coded overlock binding helps to indentify different sizes (07 – Red, 08 – Yellow, 09 – Brown – 10 – Black), Level 5 Blade cut resistance gloves makes easier to work with sharp edged objects e.g. Machine blade, glass, installing barb wire Fence etc.

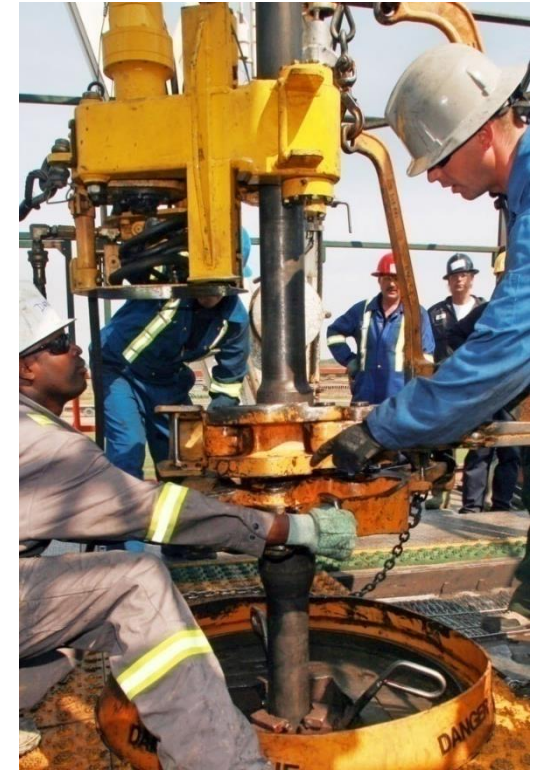

## KNITTED ARM SLEEVE

*Armsleeves are made with DuPont Kevlar® based blended yarn offer mechanical resistance, available in 13 gauge.*



**MALLCOM INDIA LTD**

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)



**Safe hands!!**

### Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

### Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

---

*Our excellent knitting technology imparts superior comfort and dexterity with unparallel mechanical and thermal risk resistant properties*

---

### Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

### Instructions for cleaning

No specific cleaning or maintenance for this type of glove.

### Packaging Instruction:

1 dozen pairs in a polybag

10 poly bags in a carton

120 pairs in a carton



Performance according to EN 388:2003 :

- 2. Resistance to abrasion (from 0 to 4)
- 4. Resistance to cut (from 0 to 5)
- 4. Resistance to tear (from 0 to 4)
- X. Resistance to puncture (from 0 to 4)

### Applications:

Construction Works.  
Lumber and mill works  
Glass sheet handling  
Metal/aluminium sheet handling  
Installing fence/ berb wire  
Machine parts assembling  
disassembling



**MALLCOM INDIA LTD**

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E: [safety@mallcom.in](mailto:safety@mallcom.in), w: [www.mallcom.in](http://www.mallcom.in)