



D33NBG

Features:

The optimal combination of cut resistance, comfort and dexterity,
Open back configuration for better ventilation,
Ergonomically correct design conforms snugly to the natural shape of the hand, increasing comfort and reducing hand fatigue,
Colour coded over lock binding helps to identify different sizes,
Nitrile dipped palm provides excellent puncture and abrasion resistance properties, also provide assistance to handling chemicals and oils.

D33NBG

Material used

Base material- Liner blended DYNEEMA®,
Fiber glass, Spandex fibre
Palm and finger tips- NBR compound coated
Binding -Colour coded over lock binding
polypropylene yarn (07-Red, 08-Yellow, 09-Brown, 10-Black)

Sizes

7, 8, 9, and 10

Colour:


Palm - Black
Back - Grey

Specifications

Gauge: 13

Weight: 62g/pair

Finishing: Sandy Finish

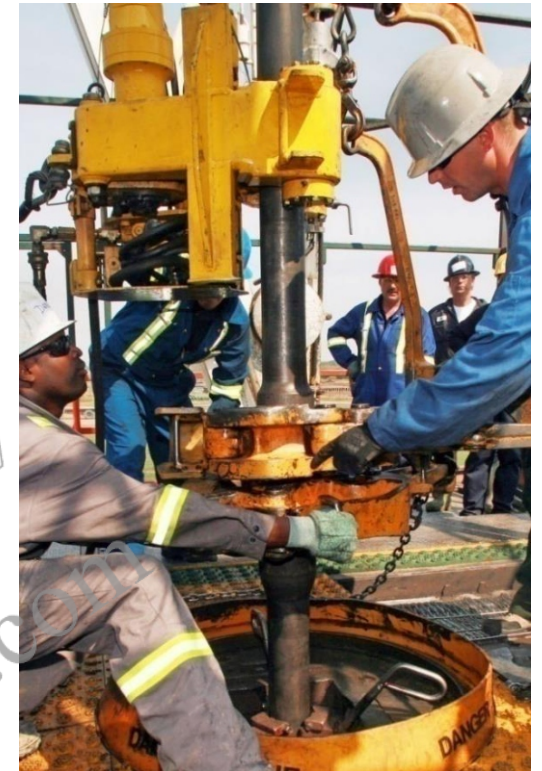

DYNEEMA® GLOVES

Cut Resistant Level 5 Seamless
Nitrile Coated Gloves Blended
with Glass fiber, Sandy Finish.



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w : www.mallcom.in



Safe hands!!

Limits to use

Do not use this glove out of its usage specifications defined in the instructions above. This glove does not contain substance known as being carcinogenic, neither toxic, nor likely to cause allergies to the sensitive people.

Instructions for storage:

Store in a cool, dry place; away from frost and light in their original packaging.

Our engineered high cut resistant blended Dyneema® yarn with nitrile coated surface provide, dexterity and mechanical resistant

Warning

Gloves not to be worn when there is a risk of entanglement by moving parts of machines

Instructions for cleaning:

No specific cleaning or maintenance for this type of glove.

Packaging Instruction:

1 dozen pairs in a polybag
10 poly bags in a carton
120 pairs in a carton

EN 388




4542C

- 4: Resistance to abrasion (from 0 to 4)
- 5: Resistance to cut (from 0 to 5)
- 4: Resistance to tear (from 0 to 4)
- 2: Resistance to puncture (from 0 to 4)
- C: TDM blade cut resistant level (from A to F)



Applications:

Automotive Aftermarket:
Chassis assembly, body trimming
Foundry operations
Machinery and Equipment:
Handling materials with sharp or rough edges
Handling metal sheets & panels
Handling parts in high heat areas
Handling parts with sharp, rough edges



MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City
Kolkata 700091, India

T: +E: safety@mallcom.in, w: www.mallcom.in